# NaLA® N18HP1/4-1ØBL

Product Specification For Inductive Differential Mode Choke Components



# MH&W International Corp.

575 Corporate Drive Mahwah, NJ 07430 USA

Phone 201-252-8125 Email: coolblue@mhw-intl.com

## **Mechanical Specification**

#### **Part Number:**

N18HP1/4-1ØBL

Nominal Core Dimensions:

0.98 X 0.79 X 0.39 inch (25 x 20 x 10 mm)

Finished Core Dimensions:

 $OD \leq 1.09 \text{ inch } (27.06 \text{ mm})$  $ID \ge 0.70 \text{ inch } (17.8 \text{ mm})$ 

 $H \le 0.49 \text{ inch } (12.5 \text{ mm})$ 


 $ext{le} = 7.1 \text{ cm} \text{ Ag} = 0.20 \text{ cm}^2$ 

Currie Temp = 1,112°F (600 °C)

RTI Temp  $(0.81) = 248^{\circ}F$   $(120^{\circ}C)$ 

Core Material: Nanoperm®

Marking: N18HP1/4-1ØBL

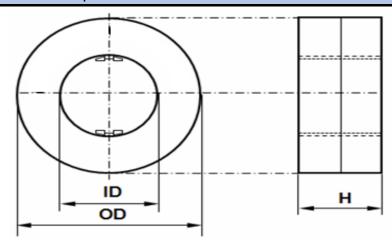

Notes:

Packing: 63 pc per layer, 6 layers/box; Box Quantity = 378 pcs

#### **Electrical Core Performance**

Permeability @ frequency = 10 KHz and Hpeak = 3.0 mA/cm ~90,000				
Inspection Value	Measured Value	Measurement Limits	Frequency	L <sub>eff</sub> * N (mA*turn)
	$A_{\ell} (\mu H/N^2)$	22.5 - 41.3	10 KHz	15
	$A_{\ell}$ (μΗ/ $N^2$ )	5.6 min	100 KHz	15

### Core Finishing

Type:	BLUE Case	Case material:	Zytel FR70G25 V0 NNC10 with RAL 5012 Blue Pigment
Case UL file Number:	E36632	Voltage Breakdown:	2,500 volts rms between two copper wires on the core

### Certification

MH&W International certifies that the manufacturing and the quality process meet all requirements of IEC Part 1: General Specification for "Fixed Inductors For Electromagnetic Interference Suppression", IEC 60938-1:1999 + A1:2006. This International Standard is used in lieu of requirements/documents pertaining to UL, CE, CSA, DIN and other individual agencies. The flame insulation rating meets UL-94V-0.

MH&W International certifies the product described herein is in compliance with the Directive 2011/65/EU of the European Parliament and of the council of 8 June, 2011 on the Restriction of the use of Certain Hazardous Substances in Electrical and Electronic Equipment (RoHS2 Directive).

Revision #	DATE	Alteration	Drawing Approval		
4	8/17/2017	INITIAL ISSUE	Engineering:	K. Giles	
5	8/14/2018	NEW CASE	Sales:	B. Wilson	
			Drawing Number: N18HP1/4-1ØBL		